


INSTALLATION INSTRUCTIONS FOR POWER KITS FOR WOODEN LOCKER SYSTEMS

Kits available for Tall, Medium, and Cubby sized lockers

Distribution Block

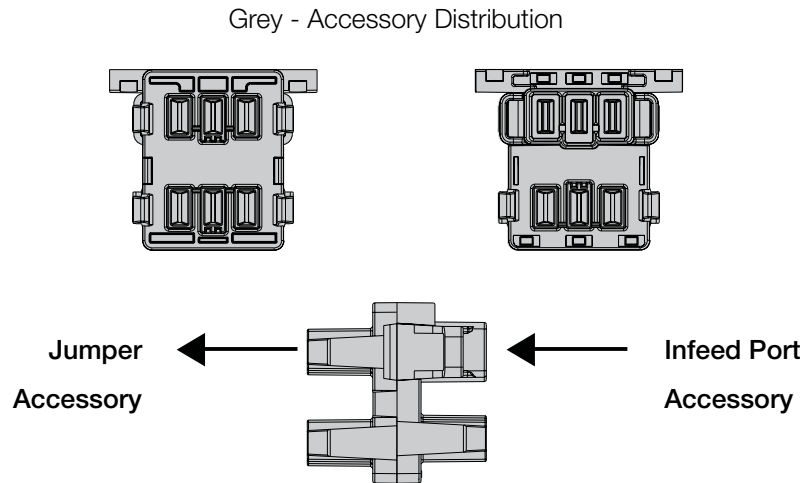


Know the general layout of your kit before you begin your install.
Reference the following Locker layout that relates to your kit.


- 1 Screw your distribution blocks onto the back side of the Lockers.

Be sure to mount the block with the infeed connector facing the direction of the power outlet that will power the system.

Use a #8 screw. (not included)

NOTE: Locations of Grey Accessory Distribution Blocks should be based off the central location of the power units it will connect.

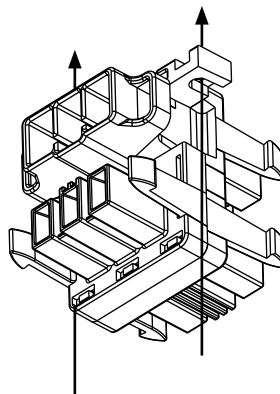






2

Insert jumper cords between distribution blocks, starting with the ports shown below. Press until tabs lock into place.

3


Drill 2" hole and insert Plastic Grommet.

Mount Miki units using supplied screws, and run power cable through Grommet and behind the back of the Locker Unit.

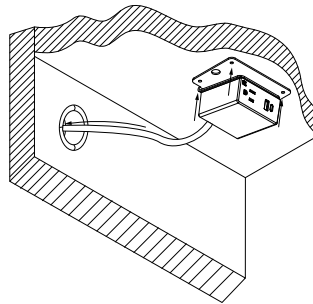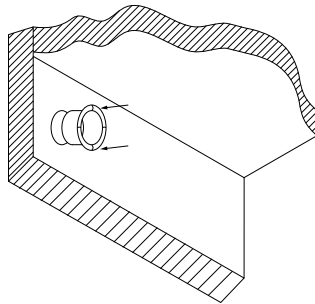


4

Insert the plug end into the outer port of a gray distribution block as shown below. Press until tabs lock into place.





5

Insert the infeed cord into the Infeed port of the first distribution block. Press until tabs lock into place.

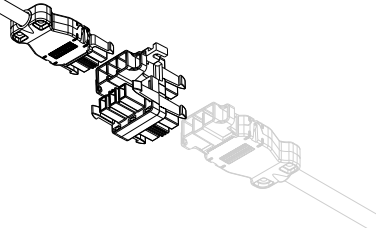


6

Install cable management along the underside of the surface.







Example Kit Layout - Tall 4-Pack

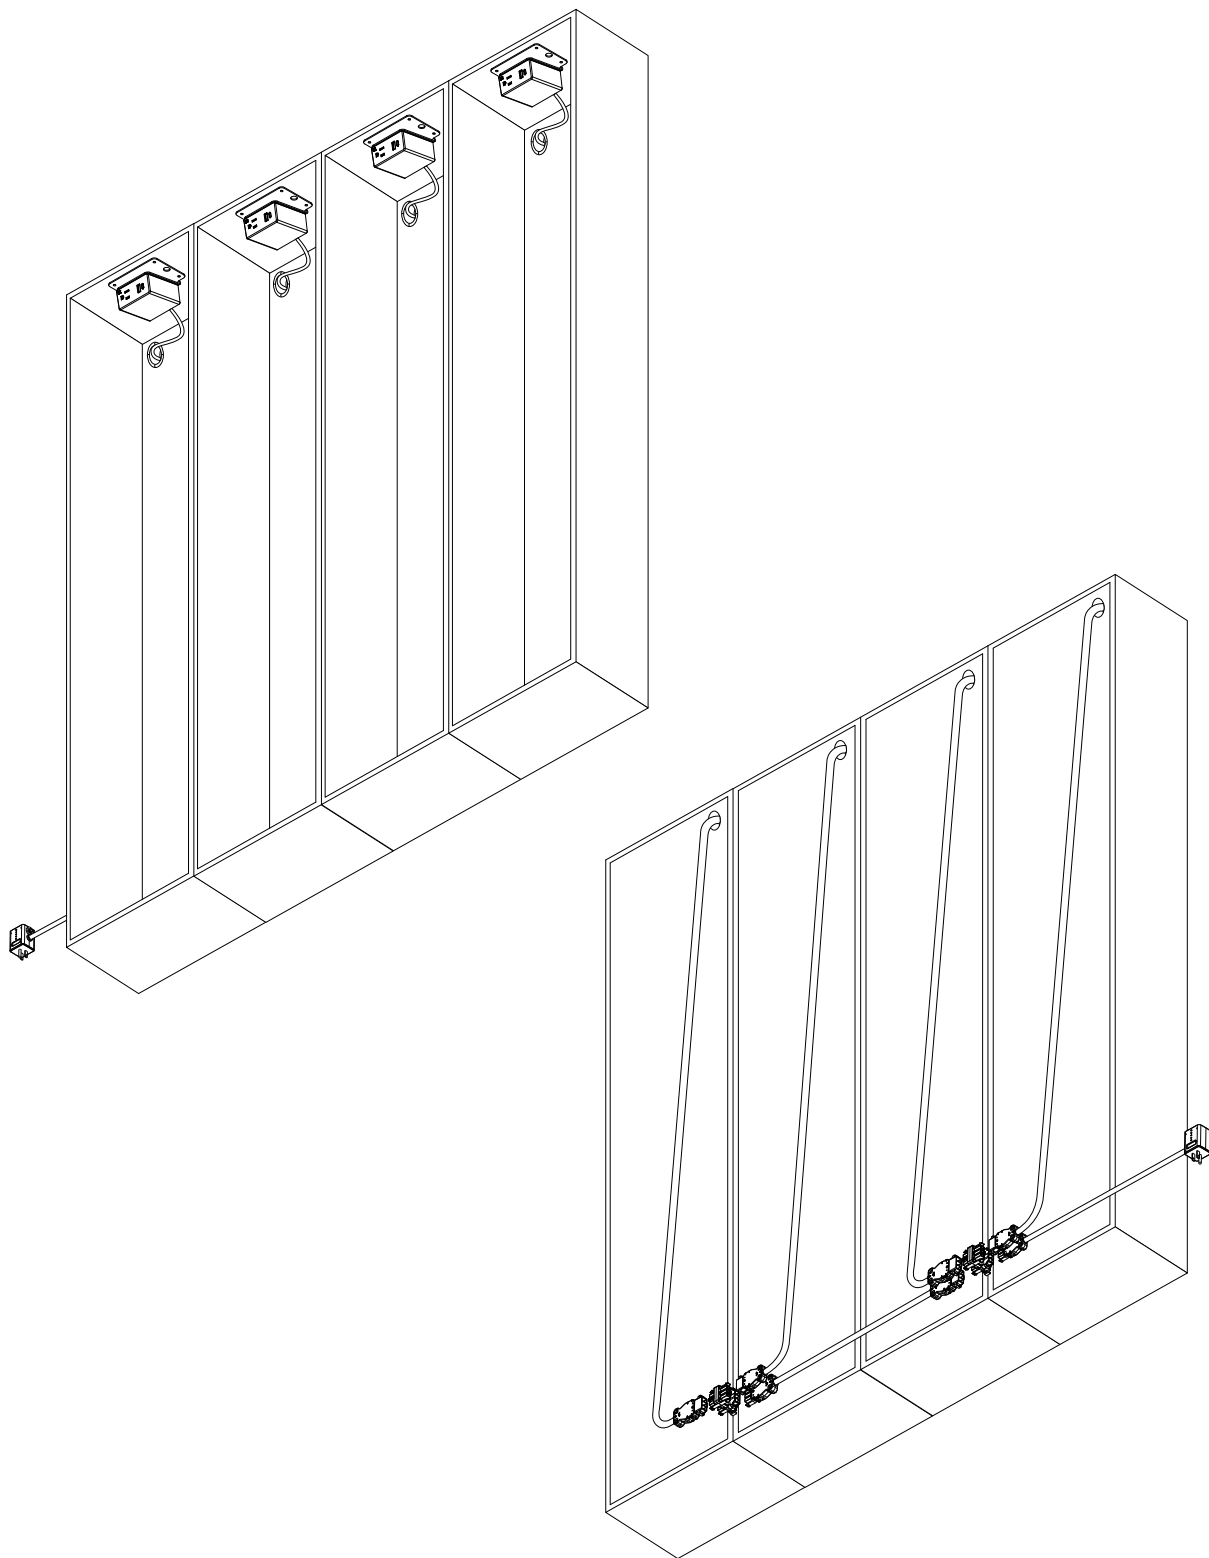






Example Kit Layout - Half 4-Pack

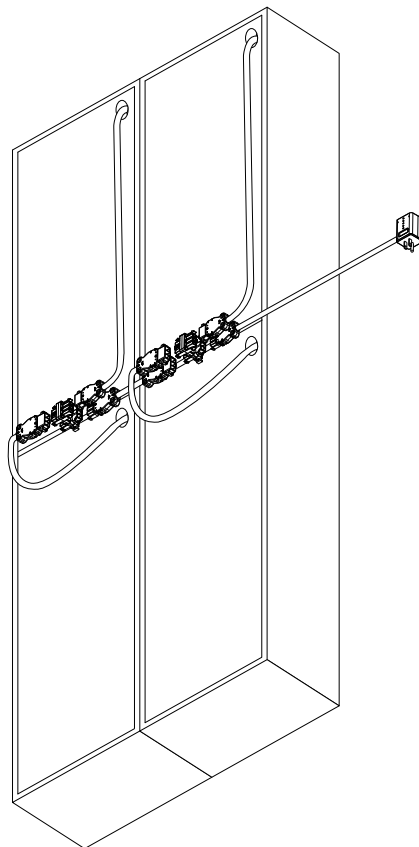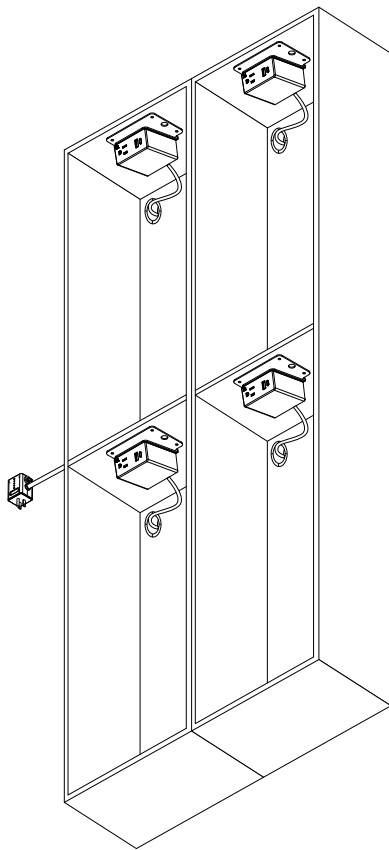

Example Kit Layout - Cubby 8-Pack

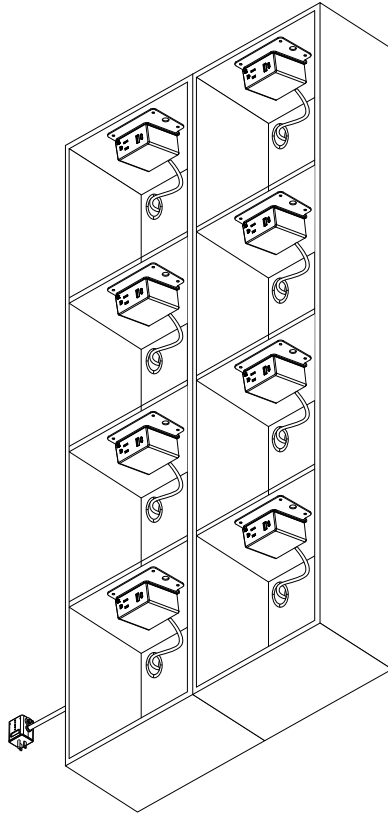

Example Kit Infeed/Jumper Layout - Cubby 20-Pack

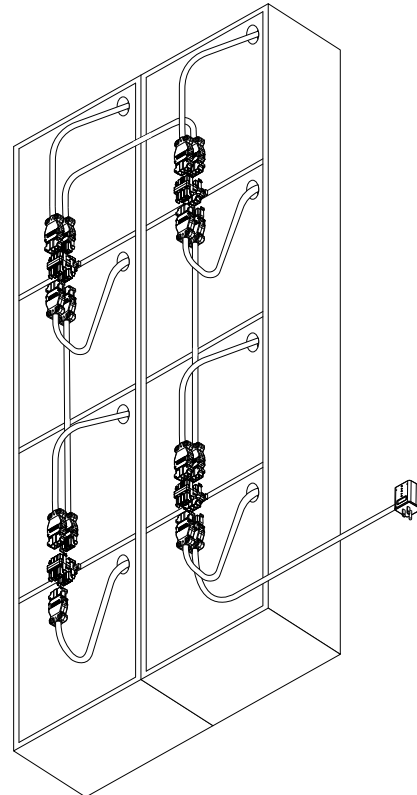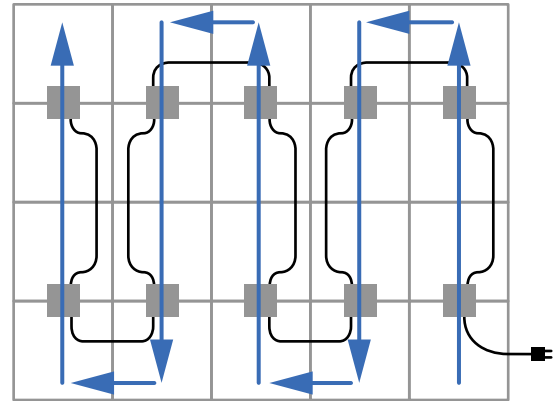



USER INSTRUCTIONS FOR PATTERN

With a maximum of 10 distribution blocks and 50ft between the plug and farthest distribution block, Pattern can be disconnected and reconfigured into different layouts even after the installation.

The pattern system cannot exceed a maximum of 15A of power draw. Here is a list of the average amps used by common devices.

Item	Amp(s)
Bluetooth Speaker	0.1
Cell Phone Charger	1-2
Coffee Maker	10
Computer Monitor	0.5
Copy Machine (Xerox)	20
Cordless Drill Charger	2-3
Crock Pot	1-2
Desktop 3-D Printer	5
Desktop Computer	4
Inkjet Printer	0.15
Laptop	1
Laser Printer	0.5
LED Task Light	0.08
Microwave	10
Office Phone	0.1
Paper Shredder	1.22
Personal Fan	0.5
Projector	1.7
Refrigerator	6
Scanner	3
Space Heater	12
Tablet	1-2
Tea Kettle	7-10
Television 42"	1
USB Charger	0.17
Vacuum	10