BYRNE

Eclipse®




* Image shown: 2 Power, 1 USB configuration with a Soft Touch Molded Black Plastic with Black simplexes

OVERVIEW

Eclipse has a sleek design which allows the product to rotate to open or close to expose or hide the power.

SPECIFICATIONS

* Images depicts a 2 Power and 1 USB unit.

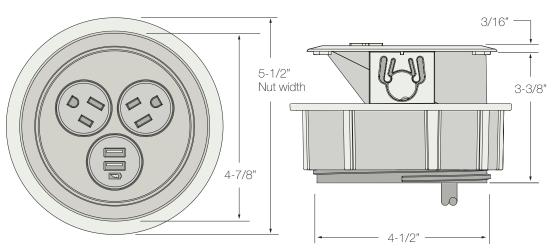

Surface Cut Out

Drill 4-1/2" Diameter Hole

Min - Max Surface Depth 3/4" - 1-1/2".

V0821 Page 1 of 2

CONFIGURATIONS

Two power unit shown with power and technologies available in the blank spaces shown below.

INTEGRATED POWER ENTRY OPTIONS & CODES


TECH

UL LISTED

Corded

CHICAGO

The Corded Eclipse can be used on Listed freestanding furnishings in Chicago. Limitations apply.





Dual USB & USB A+C

UL RECOGNIZED & ETL LISTED Interlink

Interlink IQ 2.0

FINISHES

The simplexes will remain white unless the housing is black then simplexes will default to black as well.

Soft Touch Molded Plastic





Colors above represent different material areas that change depending on the finish chosen.