

BYRNE

M2X[®]





* Image shown: 2 Power, 1 Dual USB-A+C, and 1 Dual USB-C 45W on each side

OVERVIEW


Designed for high density user areas, the maximum back-to-back configuration is ideal for applications that require additional capacity with a minimal foot print.

SPECIFICATIONS

* Images depict a 2 power, and 2 open data per side.

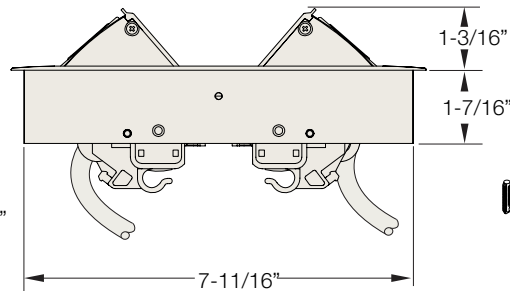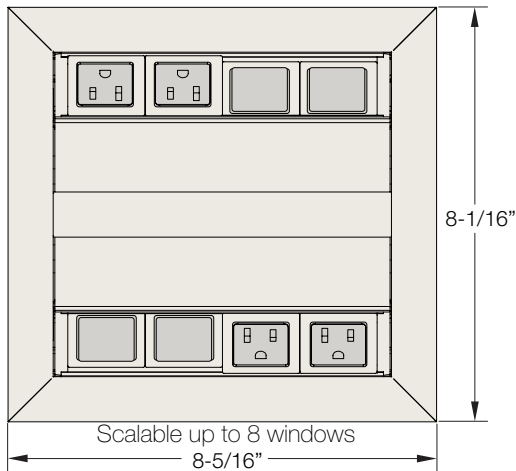


Min Surface Depth
3/8"

 7/8" when using mounting feet

Max Surface Depth
1 1/2"


CUT OUT DIMENSION

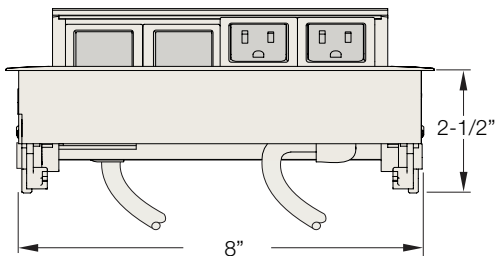

Windows Per Side	Length	Width
2 Windows	5"	7-11/16"
3 Windows	6-1/2"	7-11/16"
4 Windows	8"	7-11/16"
5 Windows	9-1/2"	7-11/16"
6 Windows	11"	7-11/16"
7 Windows	12-1/2"	7-11/16"
8 Windows	14"	7-11/16"

CUSTOMIZE BY SIZE

M2X offers from 2 to 8 windows on each side, as shown below. Each window can be replaced by a variety of power or technology options.

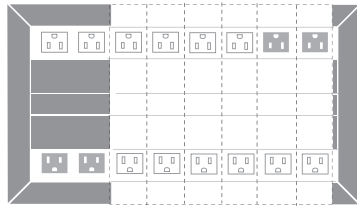

INTEGRATED TECHNOLOGIES

The power simplexes must be grouped together and installed at the **right end** of this product. Technologies requiring power must immediately follow.



NON-POWERED

Cat6, Cat6A, HDMI, DisplayPort, DVI, Mini DisplayPort, Stereo Jack, Passive USB-A, and Passive USB-C


NOTE: Factory install only for DisplayPort and Mini DisplayPort



POWERED

USB-4C, Dual C+A, Dual USB-C 45W, USB-C 60W, USB A+C

NOTE: Powered Technologies do not transfer data



POWER SIMPLEX

Tamper Resistant & Hospital Grade Available

POWER ENTRY OPTIONS

PLEASE NOTE: Product requires separate power infeed for each side.

UL LISTED

Corded
Hardwired
4-Trac interconnect
8-Trac interconnect

UL RECOGNIZED

Interlink IQ 2.0
Interlink

ETL LISTED

Interlink IQ 2.0
Interlink

CODES

NEW YORK



The Corded M2X can be used in New York City, as per the official New York City Electrical Code.

CHICAGO

The Corded M2X can be used on Listed freestanding furnishings in Chicago. Limitations apply. The Hardwired M2X must be used on all other furnishings in Chicago.

FINISHES

ANODIZED ALUMINUM

-  Black Anodized Aluminum
-  Clear Anodized Aluminum

* Black anodized aluminum is available with standard lead-time for 6, 8 and 12 ports. Other sizes may experience extended lead-times.


PLASTIC END CAPS


- | | |
|---|--|
|  White |  Dusk |
|  Black |  Berry |
|  Storm |  Peacock |
|  Fog |  Dune |
|  Honey |  Rosemary |
|  Navy |  Moss |
|  Poppy |  Clay |
| |  Pinecone |

INSIDE

-  Midnight
-  Parchment

FINISH AREAS



 Anodized Aluminum
Housing & Grommet

 Simplex, End Caps
& Window Frames