BYRNE

Mho®

OVERVIEW


Retractable and durably constructed, Mho is highly functional with a fluid, one-touch door that remains open during use. Mho offers a completely scalable solution - from 2 to 8 windows- with a variety of power options and data configurations





* Image shown: 2 Power, 1 USB-A+C, and 1 Dual USB-C 45W with Black Anodized Aluminum,

SPECIFICATIONS

* Images depicts a 2 power, and 2 open data.

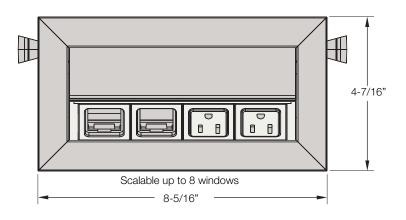



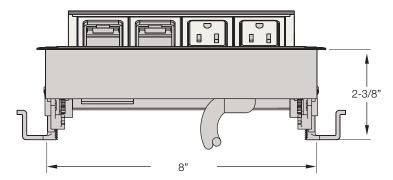

MIN SURFACE DEPTH

3/8"

7/8" when using mounting feet



CUT OUT DIMENSIONS

Windows Per Side	Length	Width
2 Windows	5"	4"
3 Windows	6-1/2"	4"
4 Windows	8"	4"
5 Windows	9-1/2"	4"
6 Windows	11"	4"
7 Windows	12-1/2"	4"
8 Windows	14"	4"

V0823 Page 1 of 3

CUSTOMIZE BY SIZE

POWER INFEED OPTIONS

CODES

Mho offers from 2 to 8 windows, as shown below. Each window can be replaced with a variety of power or technology options listed below.



UL LISTED

Corded
Hardwired
4-Trac interconnect
8-Trac interconnect

UL RECOGNIZED & ETL LISTED

Interlink IQ 2.0 Interlink

NEW YORK

The Corded Mho can be used in New York City, as per the official New York City Electrical Code.

CHICAGO

The Corded Mho can be used on Listed freestanding furnishings in Chicago. Limitations apply. The Hardwired Mho must be used on all other furnishings in Chicago.

INTEGRATED TECHNOLOGIES

The power simplexes must be grouped together and installed at the **right end** of this product. Technologies requiring power must immediately follow.



Cat6, Cat6A,n HDMI, DisplayPort, DVI, Mini DisplayPort, Stereo Jack, Passive USB-A, and Passive USB-C

NOTE: Factory install only for DisplayPort and Mini DisplayPort

USB-4C, Dual C+A, Dual USB-C 45W, USB-C 60W, USB A+C

NOTE: Powered Technologies do not transfer data

Tamper Resistant & Hospital Grade Available

FINISHES

