

BYRNE

M2X®

Single Cord

OVERVIEW

Designed for high density user areas, the back-to-back configuration is ideal for applications that require additional capacity with a minimal foot print.



* Image depicts a 4 window unit (per side) with 2 power, 2 USB-A+C

FEATURES AND BENEFITS

- Sequence used to connect two power units
- 12 amp system rating
- 15 amp power cord with integrated circuit breaker

POWER ENTRY OPTIONS

UL LISTED

Corded
Hardwired
4-Trac interconnect
8-Trac interconnect

ETL LISTED


Sequence

UL RECOGNIZED

Sequence

CUSTOMIZE BY SIZE

M2X offers from 2 to 8 windows on each side, as shown below. Each window can be replaced by a variety of power or technology options.

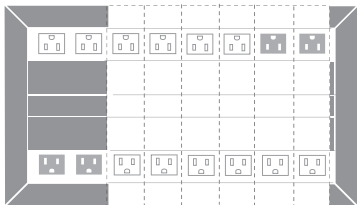

CODES

NEW YORK



The Single Cord M2x can be used in the New York City, per the official NYC Electrical Code.

CHICAGO

The Corded Single Cord M2X can be used on Listed freestanding furnishings in Chicago. Limitations apply. The Hardwired Single Cord M2X must be used on all other furnishings in Chicago

SPECIFICATIONS

* Images depict a 2 power, and 2 open data per side

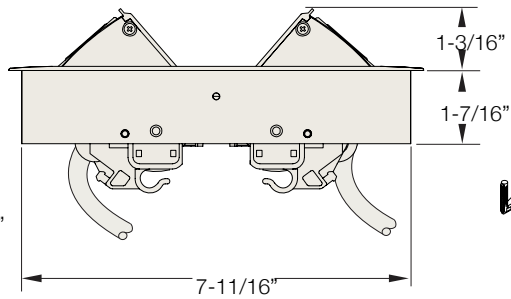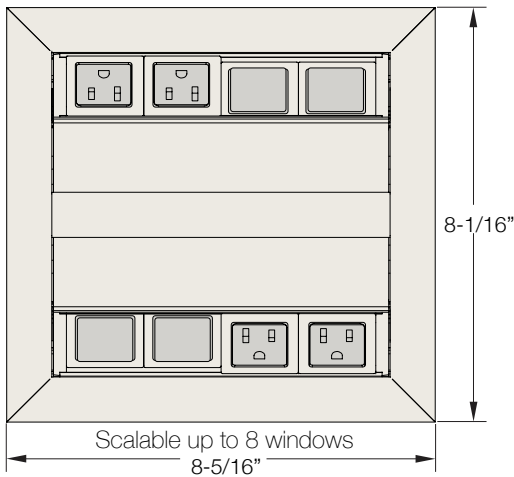


Min Surface Depth
3/8"



7/8" when using mounting feet

Max Surface Depth
1 1/2"

CUT OUT DIMENSION

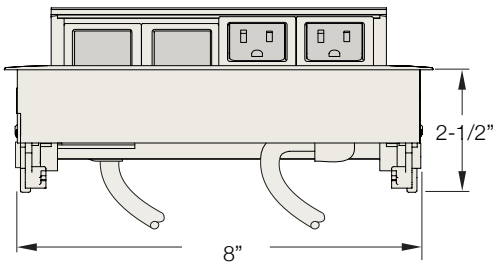

Windows Per Side	Length	Width
2 Windows	5"	7-11/16"
3 Windows	6-1/2"	7-11/16"
4 Windows	8"	7-11/16"
5 Windows	9-1/2"	7-11/16"
6 Windows	11"	7-11/16"
7 Windows	12-1/2"	7-11/16"
8 Windows	14"	7-11/16"

INTEGRATED TECHNOLOGIES

The power simplexes must be grouped together and installed at the **right end** of this product. Technologies requiring power must immediately follow.



NON-POWERED

Cat6, Cat6A, HDMI, DisplayPort, DVI, Mini DisplayPort, Stereo Jack, Passive USB-A, and Passive USB-C


NOTE: Factory install only for DisplayPort and Mini DisplayPort



POWERED

USB-4C, Dual C+A, Dual USB-C 45W, USB-C 60W, USB A+C

NOTE: Powered Technologies do not transfer data





POWER SIMPLEX

Tamper Resistant & Hospital Grade Available

FINISHES

ANODIZED ALUMINUM HOUSING & GROMMET


-  Black Anodized Aluminum
-  Clear Anodized Aluminum



* Black anodized aluminum is available with standard lead-time for 6, 8 and 12 ports. Other sizes may experience extended lead-times.

PLASTIC END CAPS & WINDOW FRAMES

- | | |
|---|--|
|  White |  Dusk |
|  Black |  Berry |
|  Storm |  Peacock |
|  Fog |  Dune |
|  Honey |  Rosemary |
|  Navy |  Moss |
|  Poppy |  Clay |
| |  Pinecone |

FINISH AREAS



-  Anodized Aluminum Housing & Grommet
-  Simplex, End Caps & Window Frames

ORDERING INFORMATION

Available configurations may vary based on partnership level. For a list of options currently available to order, please visit our partner portal, youmakebyrne.com. Can't find what you're looking for? Additional configurations may be available depending on application. Contact your Byrne Representative for more information.