BYRNE Ohm[®]




 * image shown: 4 Power, configuration with Clear Anodized Aluminum and White Plastic


OVERVIEW


Retractable and durably constructed, Ohm is highly functional with a fluid, one-touch door that remains open during use. Ohm offers a completely scalable solution - from 2 to 8 windows- with a variety of power options and data configurations

SPECIFICATIONS

* Images depict a 2 power, and 2 open data windows.







Min Surface Depth 3/8"


Max Surface Depth 1 1/2"

Cut out dimension varies based on product length

2 Windows	5"	4"
3 Windows	6-1/2"	4"
4 Windows	8"	4"
5 Windows	9-1/2"	4"
6 Windows	11"	4"
7 Windows	12-1/2"	4"
8 Windows	14"	4"

POWER INFEED OPTIONS CODES

Ohm offers from 2 to 8 windows, as shown below. Each window can be replaced by a variety of power or data options.



UL LISTED

Corded Hardwired 4-Trac interconnect 8-Trac interconnect

UL RECOGNIZED & ETL LISTED

Interlink IQ 2.0 Interlink

NEW YORK


The Corded Ohm can be used in New York City, as per the New York City Electrical Code.

CHICAGO

The Corded Ohm can be used on Listed freestanding furnishings in Chicago. Limitations apply. The Hardwired Assemble must be used on all other furnishings in Chicago.

CUSTOMIZED DATA

The power simplexes must be grouped together and installed at the **right end** of this product. Data products requiring power must

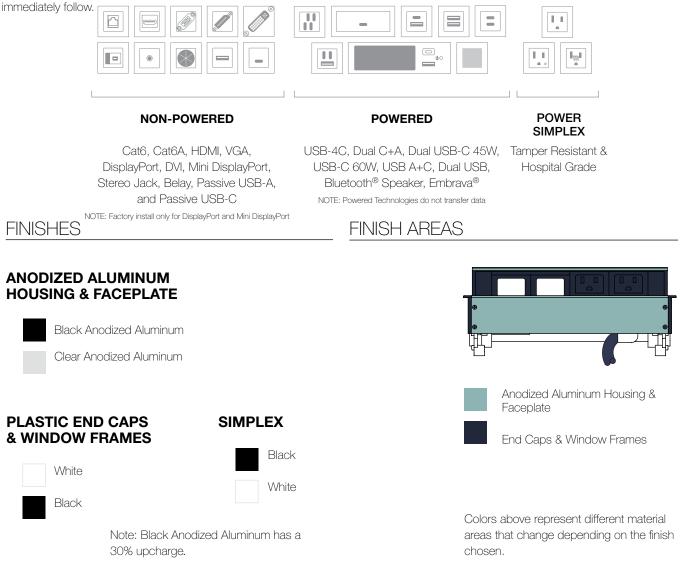

320 Byrne Industrial Drive, Rockford, MI 49341 © 2022 Byrne Electrical Specialists, Inc. All Rights Reserved www.byrne.com P 800.999.3567

2 of 2 V0322