

BYRNE

E2X

OVERVIEW



E2X is a back to back Ellora® unit within a single grommet. Like the Ellora product, connections to power and data can be concealed while in use. E2X offers a completely scalable solution - from 2 to 8 windows per side - with a variety of power options and data configurations. E2X is designed to conveniently provide power and data access from either side of the table or worksurface.



* Image shown: 6(x2) Window Unit with 3 power, 3 open data with Clear Anodized Aluminum, and Black Plastic


SPECIFICATIONS

* Images depict 6(x2) Window unit with 3 power, and 3 open data.

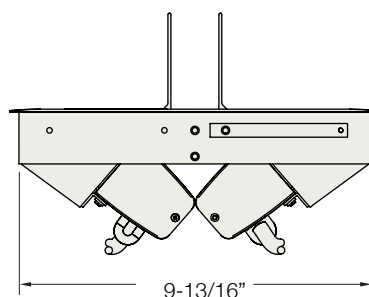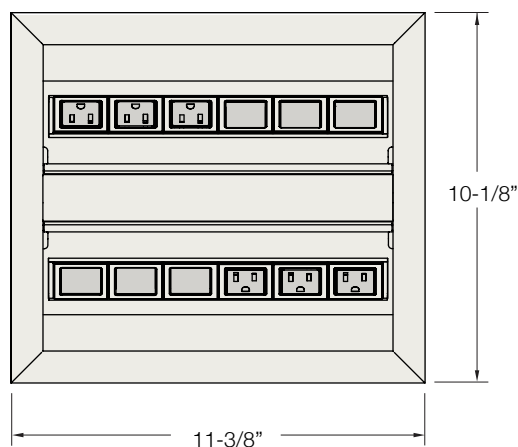

Min Surface Depth
3/8"

Max Surface Depth
1 1/2"

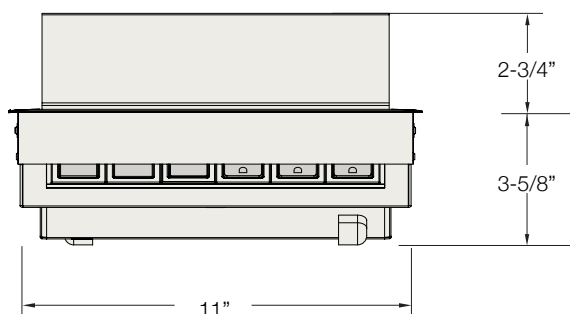


CUT OUT DIMENSION

EACH SIDE (x2)	LENGTH	WIDTH
2 Windows	5"	9-13/16"
3 Windows	6-1/2"	9-13/16"
4 Windows	8"	9-13/16"
5 Windows	9-1/2"	9-13/16"
6 Windows	11"	9-13/16"
7 Windows	12-1/2"	9-13/16"
8 Windows	14"	9-13/16"

CUSTOMIZE BY SIZE

E2X offers from 2 to 8 windows on each side, as shown below. Each side must have the same amount of windows. Each window can be replaced by a variety of power or data options.



POWER INFEED OPTIONS

PLEASE NOTE: Product requires separate power infeed for each side.

UL LISTED

- Corded
- Hardwired
- 4-Trac interconnect
- 8-Trac interconnect

UL RECOGNIZED

- Interlink IQ 2.0
- Interlink

CODES

NEW YORK

The Corded E2X can be used in New York City, as per the New York City Electrical Code.

CHICAGO

The Corded E2X can be used on Listed freestanding furnishings in Chicago. Limitations apply. The Hardwired E2X must be used on all other furnishings in Chicago

INTEGRATED TECHNOLOGIES


The power simplexes must be grouped together and installed at the **right end** of this product. Technologies requiring power must immediately follow.



NON-POWERED

Cat6, Cat6A, RJ-45, HDMI, VGA, DisplayPort, DVI, Mini DisplayPort, Stereo Jack, Belay, and Passive USB


NOTE: Factory install only for Mini DisplayPort



POWERED

USB A+C, USB-4C, Dual C+A, Dual USB-C 45W, USB-C 100W

NOTE: Powered technologies do not transfer data





POWER SIMPLEX

Tamper Resistant & Hospital Grade Available

FINISHES

ANODIZED ALUMINUM HOUSING & GROMMET



-  Black Anodized Aluminum
-  Clear Anodized Aluminum

* Black anodized aluminum is available with standard lead-time for 8, 10 and 12 ports. Other sizes may experience extended lead-times.


PLASTIC END CAPS & WINDOW FRAMES




- | | |
|---|--|
|  White |  Dusk |
|  Black |  Berry |
|  Storm |  Peacock |
|  Fog |  Dune |
|  Honey |  Rosemary |
|  Navy |  Moss |
|  Poppy |  Clay |
| |  Pinecone |

INSIDE FACEPLATE

-  Black
-  White

FINISH AREAS



-  Anodized Aluminum
-  End caps, Window Frames
-  Inside Faceplate

ORDERING INFORMATION

Available configurations may vary based on partnership level. For a list of options currently available to order, please visit our partner portal, youmakebyrne.com. Can't find what you're looking for? Additional configurations may be available depending on application. Contact your Byrne Representative for more information.